

# SANY

## SYZ326C-8W(R)

### 6×4 Heavy Duty Dump Truck for Pithead Transportation



**SYZ326C-8W(R)**  
**DUMP TRUCK**

Official Website:  
[www.sanygroup.com](http://www.sanygroup.com)

Contact : \_\_\_\_\_  
E-mail: \_\_\_\_\_




## DURABILITY



- ◆ Reliable and high quality. Manufactured by Sany, which is ranked 2nd worldwide and the 1st nationwide in construction machinery industry.
- ◆ SANY pump truck patented steel technology for chassis frame and leaf spring, the bearing performance is improved by 10%.
- ◆ Stringent testing in Sany's self-built test field. Road test with fully loaded and high intensity for 30,000 Km, which is five times more intensive than the one done in Hainan National test field.

## STRONG POWER

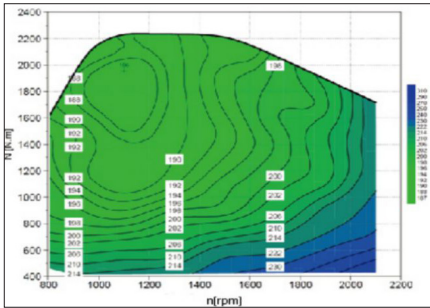

- ◆ Beiben Axle constitute the golden power train. Optimizing the configuration according to the application, the climbing performance is improved by 10% and the fuel consumption decreases of 5%.
- ◆ Engine is reliable, low maintenance cost, and powerful.
- ◆ transmission, standard 2400 N.m torque. Higher transmission efficiency, more stable output efficiency.
- ◆ The standard 16T Beiben cast steel axles, military quality, safe, reliable and perform a quality work.

## SAFE & COMFORTABLE



- ◆ Equipped with high-end cab, large space, luxury interior, the integration of driving entertainment.
- ◆ Integrally stamped and formed cabin frame, meet the European certification of positive impact and top pressure inspection.
- ◆ layout, lower center of gravity that prevents rollovers, excellent ground clearance.

## TECHNICAL SPECIFICATIONS

Model		SYZ326C-8W(R)
Overall Parameters	Code	ZZX200000045
	Rudder Direction	Right
	Curb Weight(kg)	16500
	Full Load Weight(kg)	55500
	Dimension (L×W×H)(mm)	9150×2540×3580
	Wheel Base(mm)	4200+1400
	Frame(mm)	860×316×(8+8)
	Min. Ground Clearance(mm)	≥300
	Min. turning diameter(m)	≤22
	Braking Distance $V_0=30\text{km/h(m)}$	≤10(Full load); ≤9(Empty load)
Chassis	Engine	Weichai WP12.430E201
	Displacement(L)	11.596
	Rated Power/Rev Speed(kW/rpm)	316/1900
	Maximum Torque/Rev Speed(N.m/rpm)	2000/1000-1400
	Emission Standard	Euro II
	Transmission	Fast 12JSDX240T
	Front Axle(t)	9
	Middle, Rear Axle(t)	2×16
	Cab	Sany Cab CB318
	Tyre	12.00R20
Truck	Brake	Pneumatic dual-circuit braking system with drum
	Fuel Tank(L)	400L
	Cargo Capacity(m <sup>3</sup> )	26
	Cargo Empty(mm)	6200×2350×1800
	Lifting Angle(°)	45°
Opt. func.	Lifting Mode	Front Lifting
	GPS Terminal-EMEA	•
	ABS	-